


SAMPLE SITE PLAN FIRE SAFE STANDARDS SONOMA COUNTY 1" = 50" FIRE AND EMERGENCY SERVICES DEPARTMENT SCALE 2300 COUNTY CENTER DR 01/19/17 Santa Rosa, California 95403 REVISION DATE Telephone (707) 565-1152 Fax (707) 565-1172 REVISION DATE

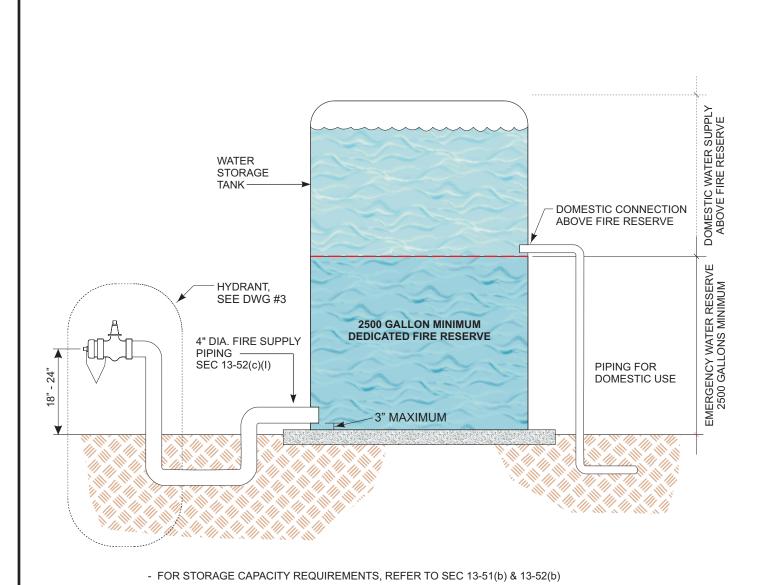

- WHEN MULTIPLE TANKS ARE UTILIZED TO ACHIEVE THE REQUIRED VOLUME OF WATER, THE CONNECTION BETWEEN THE TANKS SHALL BE BY AN APPROVED

SEC 13-51 EMERGENCY WATER SUPPLY

SONOMA COUNTY

FIRE AND EMERGENCY SERVICES DEPARTMENT
2300 COUNTY CENTER DR
Santa Rosa, California 95403
Telephone (707) 565-1152 Fax (707) 565-1172

FIRE SAFE STANDARDS


DRAWING NO


NOT TO SCALE

SCALE

01/19/17
REVISION DATE

4" DIA. WATER LINE

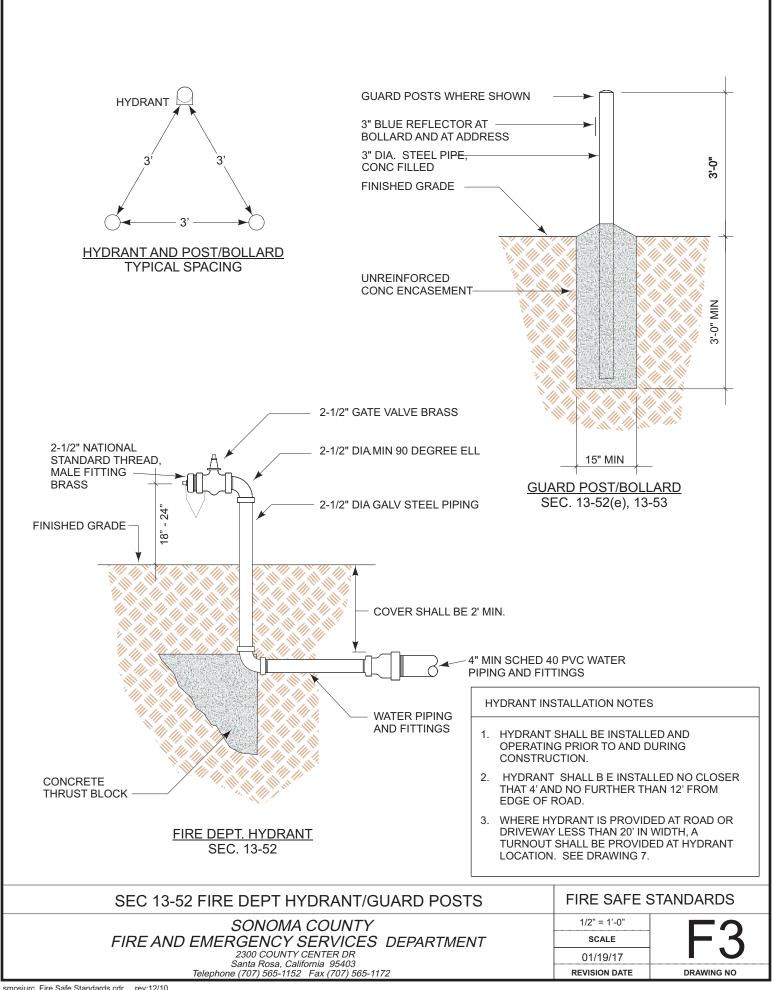

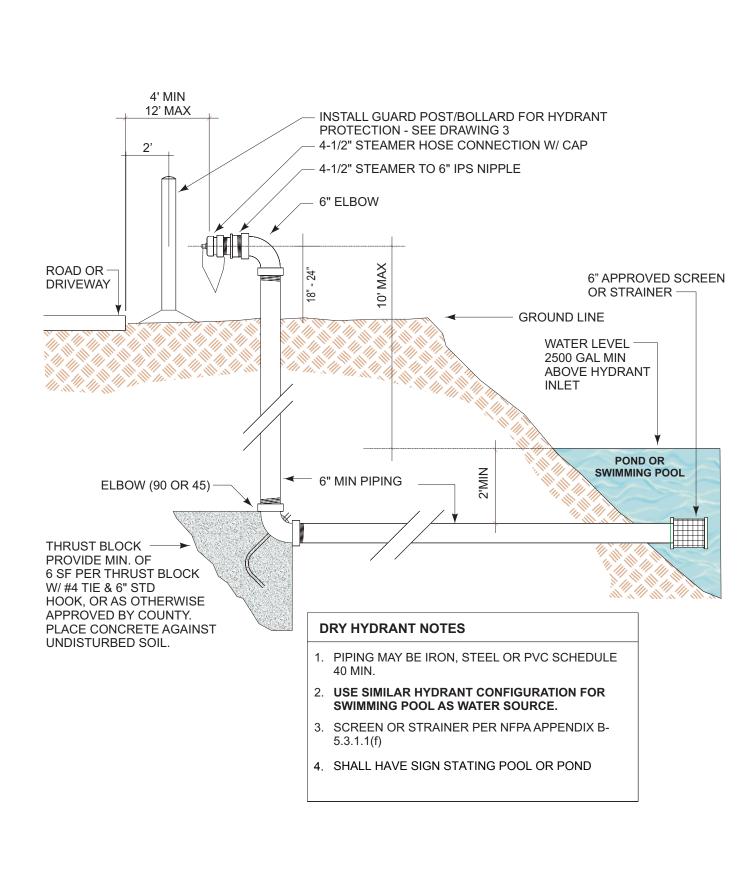

SEC 13-52(e) DRY OR DRAFT HYDRANT	FIRE SAFE STANDARDS	
SONOMA COUNTY FIRE AND EMERGENCY SERVICES DEPARTMENT 2300 COUNTY CENTER DR Santa Rosa, California 95403 Telephone (707) 565-1152 Fax (707) 565-1172	1/2" = 1'-0"	
	SCALE	⊢ 4
	01/19/17	
	REVISION DATE	DRAWING NO

ALL BRIDGES

- HS 20 LOADING [SEC 13-33(a)]

 SIGNS INDICATING WEIGHT LIMIT AND VERTICAL CLEARANCE LIMITS [SEC 13-33 (b)]

- COMBINATION VEHICLE/PEDESTRIAN GUARD RAILS BOTH SIDES

ONE LANE BRIDGE

- MINIMUM WIDTH: 12.0' [SEC 13-33(c)] EXCEPT DRIVEWAYS WITH MAXIMUM LENGTH OF 65' IN WHICH CASE MINIMUM WIDTH MAY BE 10.0'

 SIGNS INDICATING ONE WAY OR ONE LANE CONDITION [SEC 13-33 (b)]

- UNOBSTRUCTED VISIBILITY ENTIRE LENGTH [SEC 13-33(c)]


- TURNOUTS AT BOTH ENDS [SEC 13-33(c)]


BRIDGE WIDTH: 12' MAX.

LOAD: 80,000 LBS

CERT YEAR. XXXX

SIGN EXAMPLE NOT TO SCALE

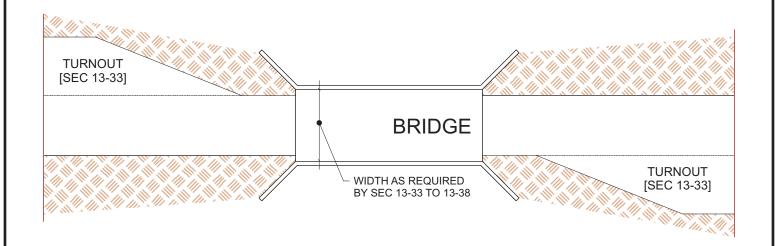

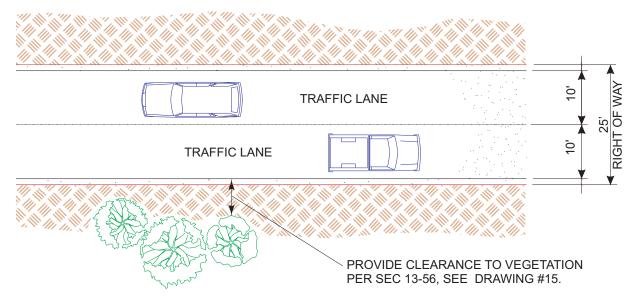

TWO WAY ROAD SEC. 13-34


- MINIMUM RIGHT OF WAY: 25'
- WIDTH AS REQUIRED BY SEC 13-33 TO 13-38




DRIVEWAY SEC. 13-37

- WIDTH AS REQUIRED BY SEC 13-33 TO 13-38
- DRIVEWAYS SERVE BUILDINGS
- ROADS SERVE PARCELS

SEC 13-34 ROAD/SEC 13-37 DRIVEWAY	FIRE SAFE STANDARDS	
SONOMA COUNTY	1/16" = 1'-0"	
FIRE AND EMERGENCY SERVICES DEPARTMENT 2300 COUNTY CENTER DR Santa Rosa, California 95403	SCALE	Hh
	01/19/17	IU
Telephone (707) 565-1152 Fax (707) 565-1172	REVISION DATE	DRAWING NO

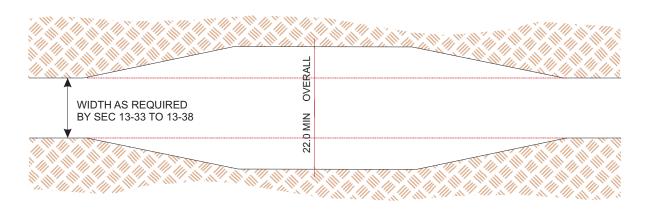


BULGE TURNOUT

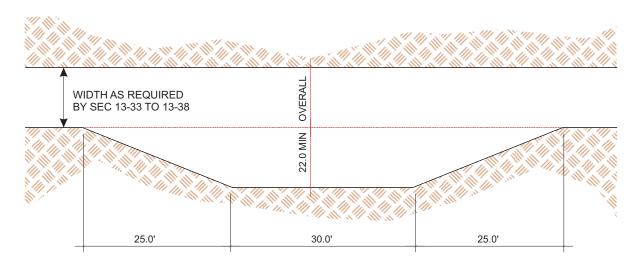


TURNOUT

[SEC 13-37(b)] ALL DRIVEWAYS EXCEEDING ONE HUNDRED FIFTY (150) FEET IN LENGTH SHALL HAVE A TURNOUT CONSTRUCTED AT APPROXIMATELY THE MIDPOINT OF THE DRIVEWAY. ANY DRIVEWAY EXCEEDING EIGHT HUNDRED (800) FEET IN LENGTH SHALL HAVE TURNOUTS CONSTRUCTED APPROXIMATELY EVERY FOUR HUNDRED (400) FEET ALONG THE ENTIRE LENGTH OF THE DRIVEWAY.

[SEC 13-35(c)] ALL ONE-WAY ROADS EXCEEDING FIVE HUNDRED (500') IN LENGTH SHALL HAVE A TURNOUT CONSTRUCTED AT APPROXIMATELY THE MIDPOINT OF THE ROAD. ANY ONE-WAY ROAD EXCEEDING ONE THOUSAND FEET (1000') IN LENGTH SHALL ALSO HAVE TURNOUTS CONSTRUCTED APPROXIMATELY EVERY FIVE HUNDRED FEET (500') ALONG THE ENTIRE LENGTH OF THE ROAD.

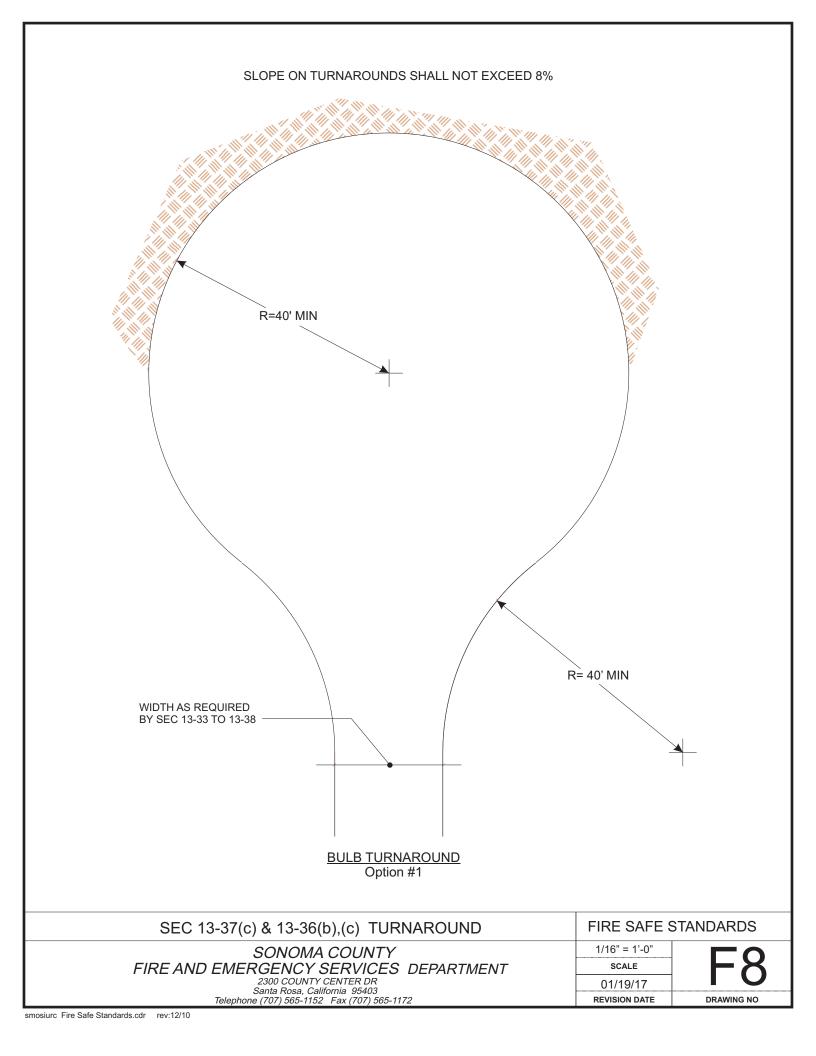


SLOPE ON TURNAROUNDS SHALL NOT EXCEED 8%

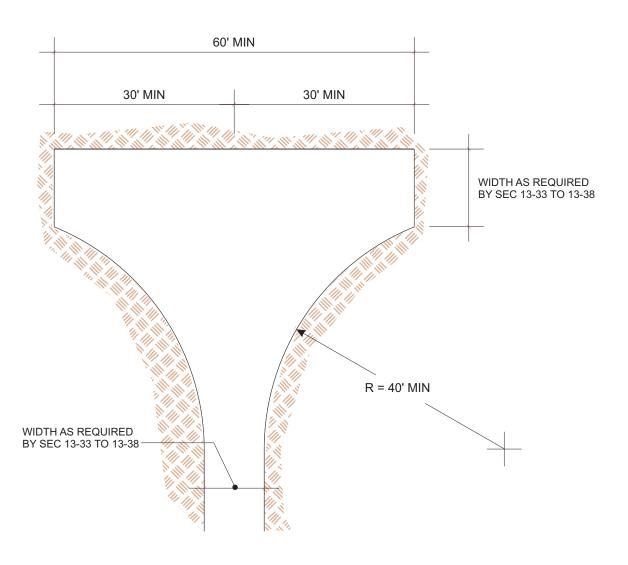


HAMMERHEAD TURNAROUND Option #2

SEC 13-37(c) & 13-36(b),(c) HAMMERHEAD/T FIRE SAFE STANDARDS 1/16" = 1'-0" SONOMA COUNTY FIRE AND EMERGENCY SERVICES DEPARTMENT
2300 COUNTY CENTER DR
Santa Rosa, California 95403
Telephone (707) 565-1152 Fax (707) 565-1172 SCALE 01/19/17

REVISION DATE

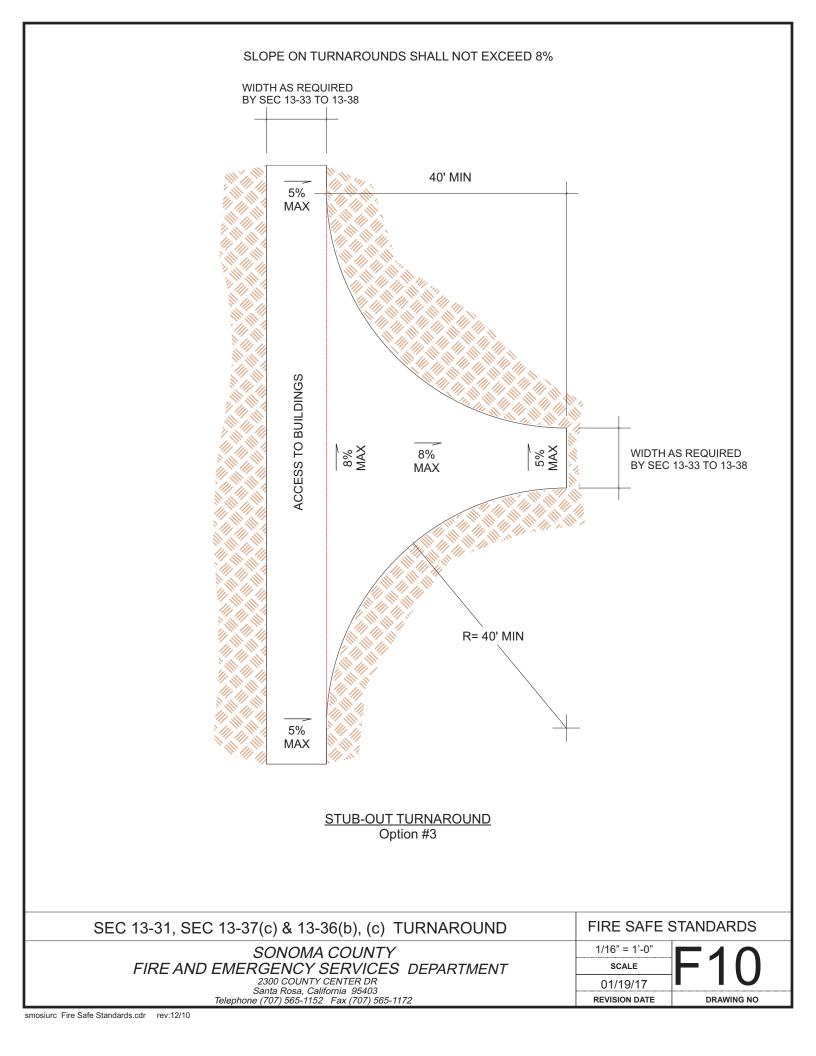

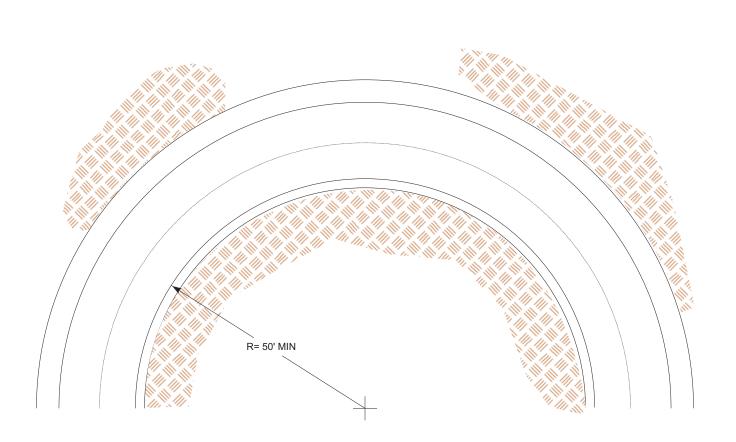

HORIZONTAL CURVE TURNING RADIUS, ROAD/DRIVEWAY **SECTION 13-32**


- HORIZONTAL INSIDE RADIUS 50' MIN
- ADDITIONAL WIDTHS ARE REQUIRED:
 - 4' IF RADIUS IS LESS THAN 100' AND A CENTRAL ANGLE > 45 DEGREES
 - 2' IF RADIUS IS 100' TO 200' AND A CENTRAL ANGLE > 45 DEGREES
- TURNOUTS ARE NOT ALLOWED ON THE INSIDE OF CURVES.

SEC 13-32, ROAD/DRIVEWAY CURVES

SONOMA COUNTY FIRE AND EMERGENCY SERVICES DEPARTMENT
2300 COUNTY CENTER DR
Santa Rosa, California 95403
Telephone (707) 565-1152 Fax (707) 565-1172


FIRE SAFE STANDARDS

1/16" = 1'-0" SCALE 01/19/17 **REVISION DATE**

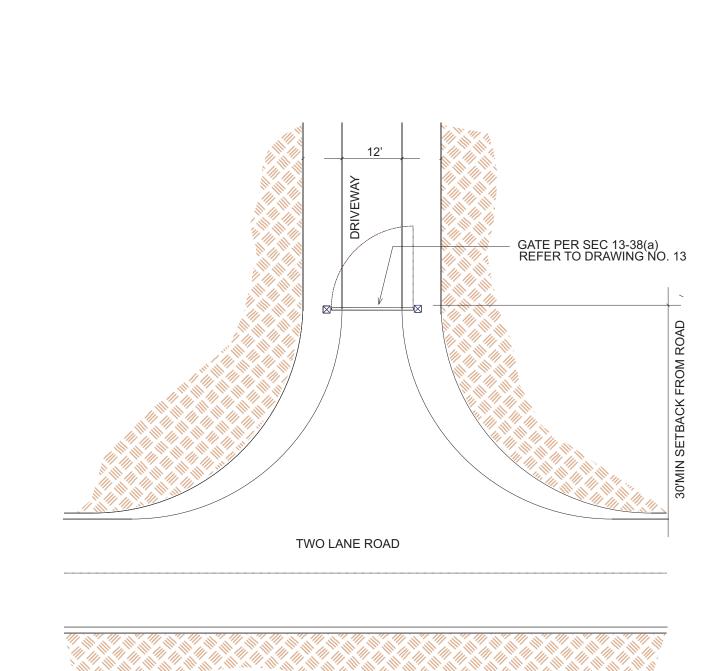

GATED ENTRANCES SECTION 13-38

- GATE ENTRANCE 2 FEET WIDER THAN WIDTH OF TRAFFIC LANE [SEC 13-28(a)]
- 30 FEET FROM THE ROADWAY, OPEN TO ALLOW A VEHICLE TO STOP WITHOUT OBSTRUCTING TRAFFIC [SEC 13-38(B)]
- PROVIDE FIRE DEPARTMENT APPROVED KEY ACCESS [13-38(D)]

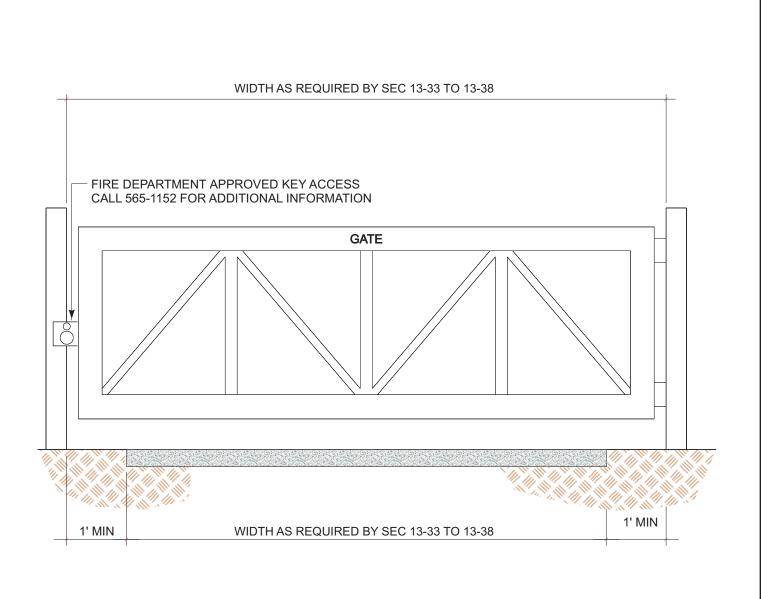


GATE WIDTH SHALL BE NO LESS THAN WIDTH OF ROAD PLUS 1' SHOULDER, EACH SIDE OF ROAD

SEC 13-38 GATE

SONOMA COUNTY FIRE AND EMERGENCY SERVICES DEPARTMENT
2300 COUNTY CENTER DR
Santa Rosa, California 95403
Telephone (707) 565-1152 Fax (707) 565-1172

FIRE SAFE STANDARDS 1/2" = 1'-0" SCALE 01/19/17 **REVISION DATE**



0% - 5%

GRAVEL SURFACE: 1.00 FEET COMPACTED CLASS 2

AGGREGATE BASE [SEC 13-30(a)]

5% - 10%


SEAL COAT SURFACE: DOUBLE SEAL COAT OVER 1.00 FEET COMPACTED CLASS 2 AGGREGATE BASE

[SEC 13-30(b)]

OVER 10%

ASPHALTIC CONCRETE SURFACE: 0.20 FEET ASPHALTIC CONCRETE OVER 0.50 FEET COMPACTED CLASS 2

AGGREGATE BASE [SEC 13-30(c)]

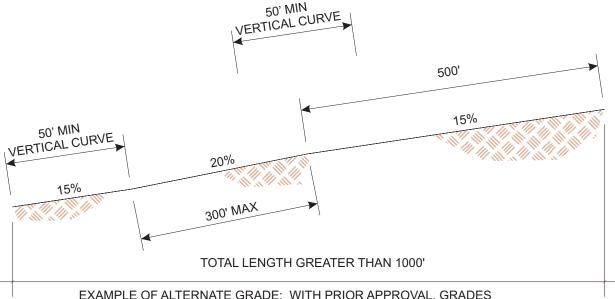

EXAMPLE OF ALTERNATE GRADE: WITH PRIOR APPROVAL, GRADES MAY BE UP TO 20% FOR DISTANCES NOT EXCEEDING 300' WITHIN ANY 1000' OF ROAD LENGTH.

GRADES & SURFACES SECTION 13-30 & 13-31

SEC 13-30 & 13-31 GRADES & SURFACES

SONOMA COUNTY FIRE AND EMERGENCY SERVICES DEPARTMENT

2300 COUNTY CENTER DR Santa Rosa, California 95403 Telephone (707) 565-1152 Fax (707) 565-1172 FIRE SAFE STANDARDS


NOT TO SCALE


SCALE

01/19/17


REVISION DATE

DRAWING NO

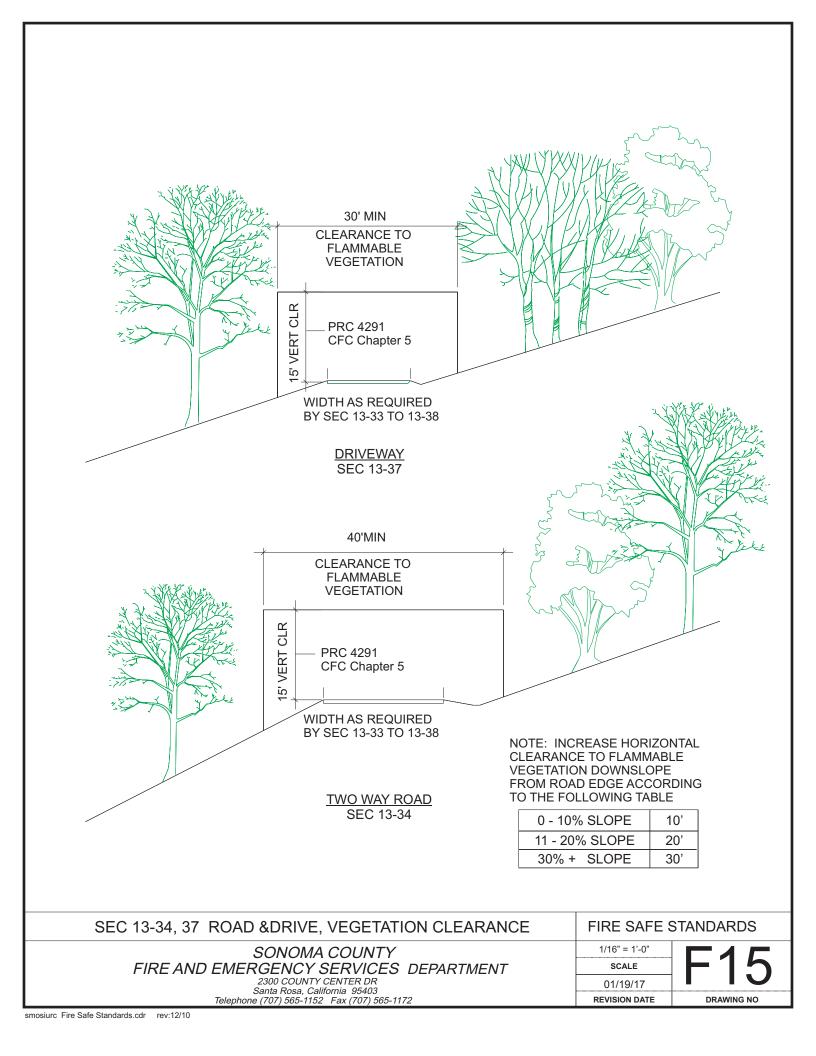

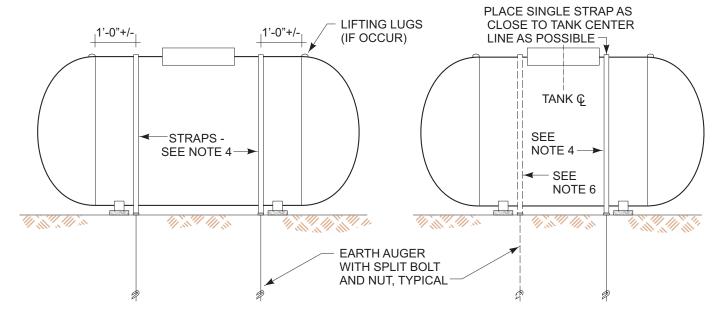

351-1500 GALLON TANK ELEVATION 2 STRAP PLACEMENT

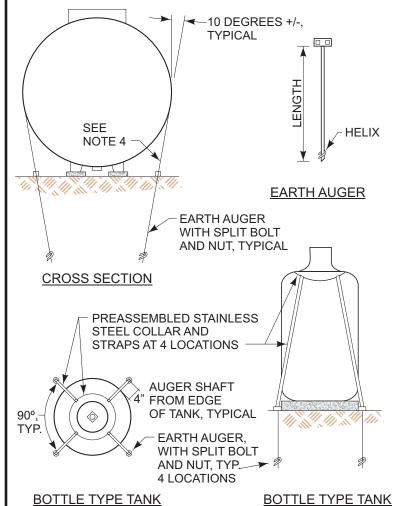

UP TO 350 GALLON TANK ELEVATION 1 STRAP PLACEMENT

NOTES

- 1. PRIOR TO INSTALLING THE EARTH AUGERS, CHECK FOR UNDERGROUND UTILITIES.
- THE EARTH AUGERS AND STRAPS SHOWN HEREON ARE DESIGNED TO RESIST THE BOUYANCY FORCES FROM AN EMPTY TANK FULLY SUBMERGED, AND THE LATERAL FORCES GENERATED FROM SEISMIC ZONE 4 ACTIVITY.
- EARTH AUGER TYPES AND LENGTHS REQUIRED ARE DEPENDANT UPON THE EXISTING SOIL CONDITIONS:
 - a. ALL CLASS 5 SOILS (CLAY, SANDY CLAY, SILTY CLAY AND CLAYEY SILT) AND SAND, SILTY SAND AND CLAYEY SAND OF THE CLASS 4 SOILS REQUIRE EARTH AUGERS OF MINIMUM 48 INCHES IN LENGTH AND (1) 6 INCH DIAMETER HELIX.
 - b. CLASS 4 AND BETTER SOILS WITH THE EXCEPTION OF SAND, SILTY SAND, AND CLAYEY SAND REQUIRE EARTH AUGERS OF MINIMUM 32 INCHÉS IN LENGTH AND (2) 4 INCH DIAMETER HELIXES.
 - c. EARTH AUGERS SHALL HAV A TESTED MINIMUM PULL OUT VALUE OF 6000 LBS
- STRAPS SHALL BE ONE OF THE FOLLOWING:
 a. 1-1/4"x0.031" STAINLESS STEEL, 301-1/4 HARD, MINIMUM TENSILE STRENGTH OF 4750 LBS
 - b. 1-1/4"x0.031" GALVANIZED STEEL, CLASS B, GRADE 1, MINIMUM TENSILE STRENGTH OF 4750 LBS.
- 5. IN THE EVENT EARTH AUGERS ARE PRECLUDED FROM INSTALLATION, ALTERNATE TETHERING DESIGNS CAN BE SUBMITTED FOR CONSIDERATION.
- IN ALL CASES. WHEN TANKS UP TO 350 GALLONS ARE PLACED IN AREAS OF SOIL TYPES AS DESCRIBED IN NOTE 3a, 2 STRAPS AND 4 EARTH AUGERS ARE REQUIRED. EARTH AUGER SIZE IS AS NOTED IN 3-a.
- 7. MINIMUM DISTANCES OF TANKS FROM STRUCTURES AND PROPERTY

CHAPTER 61 CALIFORNIA FIRE CODE

Distance from buildings and property lines based on size of LPG container capacity.

SIZE	UNDERGROUND	ABOVEGROUND	
0-125	10	5 with conditions	
125-500	10	10	
501-2000	10	25	
2001-30,00	0 50	50	
All others see CFC Table			

8. Earth Augers are required in areas subject to flooding. All others may be bolted or cable tied to a concrete slab seismic only. Per CFC

SEISMIC STABILIZATION & SEPARATIONS

SONOMA COUNTY FIRE AND EMERGENCY SERVICES DEPARTMENT

ELEVATION

2300 COUNTY CENTER DR Santa Rosa, California 95403 Telephone (707) 565-1152 Fax (707) 565-1172

	NOT TO SCALE	7
	SCALE	F1 h
	01/19/17	1 1 0
REVISION DATE		DRAWING NO

FIRE SAFE STANDARDS

BOTTLE TYPE TANK

PLAN VIEW

